



Pololu 24V Step-Up/Step-Down Voltage Regulator S18V20F24

This is a merged information page for Item #2582.

[View normal product page.](#)

Pololu item #: 2582

Brand: [Pololu](#)

Status: Active and Preferred [?](#)

[✓ RoHS 3](#)



This powerful step-up/step-down regulator efficiently produces a fixed **24 V** output from input voltages between 3 V and 30 V while allowing a typical output current of up to 2 A when the input voltage is close to the output voltage and offering typical efficiencies of 80% to 90%. Its ability to convert both higher and lower input voltages makes it useful for applications where the power supply voltage can vary greatly, as with batteries that start above but discharge below the regulated voltage.

Alternatives available with variations in these parameter(s): output voltage [Select variant...](#)

Pictures



Pololu 24V Step-Up/Step-Down Voltage Regulator S18V20F24.



Pololu step-up/step-down voltage regulator S18V20x, bottom view with dimensions.



Pololu fixed step-up/step-down voltage regulator S18V20Fx with included optional terminal blocks and header pins.



Pololu fixed step-up/step-down voltage regulator S18V20Fx, assembled with included terminal blocks.



Pololu step-up/step-down voltage regulator S18V20x showing wires soldered directly to the board and passing through the




Pololu fixed step-up/step-down voltage regulator S18V20Fx, labeled top view.

Overview


These step-up/step-down regulators take an input voltage from 3 V to 30 V and increase or decrease it as




Pololu 9V step-up/step-down voltage regulator S18V20F9, top view.

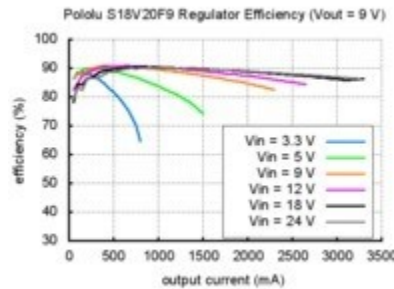


Typical efficiency of Pololu 9V step-up/step down voltage regulator S18V20F9.

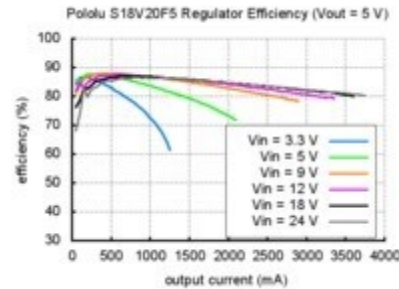


Typical efficiency of Pololu 5V step-up/step down voltage regulator S18V20F5.

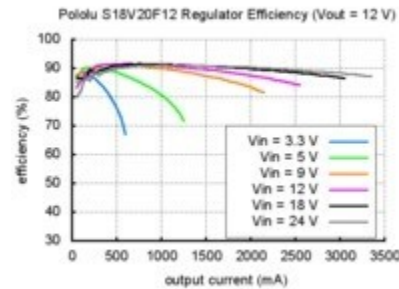

Typical efficiency of Pololu 12V step-up/step down voltage regulator S18V20F12.

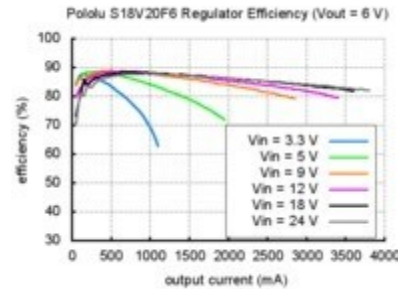

Typical efficiency of Pololu 6V step-up/step down voltage regulator S18V20F6.

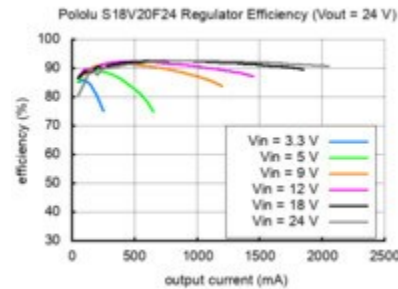


Typical efficiency of Pololu 24V step-up/step down voltage regulator S18V20F24.

necessary to produce a fixed 5 V, 6 V, 9 V, 12 V, or 24 V output, depending on the version. They are switching regulators (also called switched-mode power supplies (SMPS) or DC-to-DC converters) with a single-ended primary-inductor converter (SEPIC) topology, and they have a typical efficiency between 80% and 90%. The available output current is a function of the input voltage, output voltage, and efficiency (see the *Typical Efficiency and Output Current*

section below), but it will be around 2 A when the input voltage is close to the output voltage.

The S18V20x regulator family consists of the five fixed-output versions mentioned above along with two adjustable-output versions: the [S18V20ALV](#) offers an output range of 4 V to 12 V and the [S18V20AHV](#) offers an

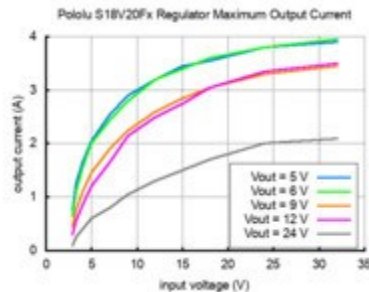

Typical maximum output current of Pololu fixed voltage step-up/step-down voltage regulators (S18V20F5, S18V20F6,

voltage throughout its life, new battery packs and form factors can be considered. For example:


- A 4-cell battery holder, which might have a 6 V output with fresh alkalines or a 4.0 V output with partially discharged NiMH cells, can be used with the 5V version of this regulator to power a 5 V circuit.
- A disposable 9 V battery powering a 5V circuit can be discharged to under 3 V instead of cutting out at 6 V, as with typical linear or step-down regulators.
- The 6V version of this regulator can be used to enable a wide range of power supply options for a hobby servo project.

The no-load quiescent current will typically be around 1 mA for most combinations of input and output voltages, though the combination of a very high output voltage and a very low input voltage (e.g. when boosting from 3 V in to 30 V out) can result in quiescent currents on the order of a few dozen milliamps.

The ENABLE pin can be used to put the board in a low-power state that reduces the quiescent current to between 10 and 20 μA per volt on VIN (e.g. approximately 30 μA with 3 V in and 500 μA with 30 V in).

This regulator has built-in reverse-voltage protection, over-current protection, thermal shutdown (which typically

output range of 9 V to 30 V. The different versions of the board all look very similar, so the bottom silkscreen includes a blank space where you can add your own distinguishing marks or labels. This product page applies to all four fixed-output versions of the S18V20x family.

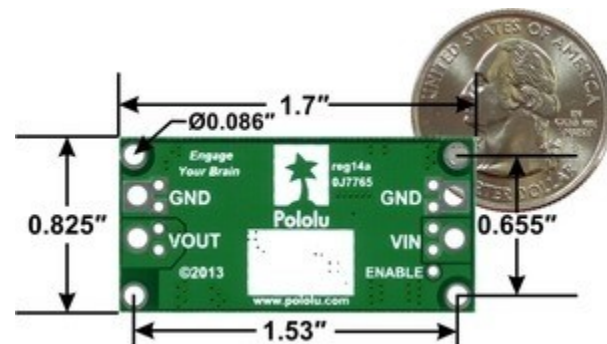

activates at 165°C), and an under-voltage lockout that causes the regulator to turn off when the input voltage is below 2.5 V (typical).

For powerful boost-only regulators, consider our [U3V70x regulator family](#), which are typically more appropriate if you know that your input voltage will always be lower than your output voltage.

Features

- Input voltage: 2.9 V to 32 V¹
- Fixed 5 V, 6 V, 9 V, 12 V, or 24 V output with 4% accuracy
- Typical maximum output current: 2 A (when input voltage is close to the output voltage; the *Typical Efficiency and Output Current* section below shows how the achievable output current depends on input and output voltages)
- Integrated reverse-voltage protection (up to 30 V), over-current protection, over-temperature shutoff, and under-voltage lockout
- Typical efficiency of 80% to 90%, depending on input voltage, output voltage, and load
- Four 0.086" mounting holes for #2 or M2 [screws](#)
- Compact size: 1.7" × 0.825" × 0.38" (43 × 21 × 10 mm)
- Smaller holes for 0.1" header pins and larger holes for terminal blocks offer several options for connecting to the board


¹ 32 V is the absolute maximum operating voltage; the recommended maximum operating voltage is 30 V, which is the limit of the reverse voltage protection.

Using the regulator

Connections

This step-up/step-down regulator has four connections: input voltage (VIN), ground (GND), and output voltage

(VOUT), and ENABLE.

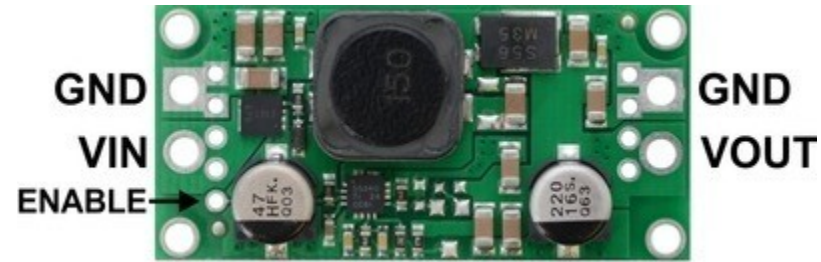

The input voltage, VIN, should be between 2.9 V and 32 V. Lower input voltages can cause the regulator to shut down or behave erratically; higher input voltages can destroy the regulator, so you should ensure that noise on the input is not excessive. 32 V should be treated as the absolute maximum input voltage. Our recommended maximum operating voltage is 30 V, which is the limit of the reverse voltage protection.

The regulator is enabled by default: a 100 kΩ pull-up resistor on the board connects the ENABLE pin to reverse-protected VIN. The ENABLE pin can be driven low (under 0.7 V) to put the board into a low-power state. The quiescent current draw in this sleep mode is dominated by the current in the pull-up resistor from ENABLE to VIN and by the reverse-voltage protection circuit, which will draw between 10 μA and 20 μA per volt on VIN when ENABLE is held low (e.g. approximately 30 μA with 3 V in and 500 μA with 30 V in). If you do not need this feature, you should leave the ENABLE pin disconnected. Note that the SEPIC topology has an inherent capacitor from input to output; therefore, the output is not completely disconnected from the input even when the regulator is shut down.



Pololu fixed step-up/step-down voltage regulator S18V20Fx with included optional terminal blocks and header pins.



Pololu fixed step-up/step-down voltage regulator S18V20Fx, assembled with included terminal blocks.





The connections are labeled on the back side of the PCB, and the board offers several options for making electrical connections. You can solder the included [2-pin 5mm-pitch terminal blocks](#) to the two pairs of larger holes on the ends of the board. Alternatively, if you want to use this regulator with a solderless [breadboard](#), 0.1"-pitch [connectors](#), or other prototyping arrangements that use a 0.1" grid, you can solder pieces of the included 9×1 [straight male header strip](#) to the 0.1"-spaced smaller holes (each large through-hole has a corresponding pair of these smaller holes). For the most compact installation, you can solder wires directly to the board.




The board has four 0.086" mounting holes intended for #2 or M2 [screws](#). In applications where mounting screws are not used and wires are soldered directly to the board, the insulated part of the wires can be passed through the mounting holes for strain relief. The picture above shows an example of this with [20 AWG wire](#), which was close to the limit of what would fit through the mounting holes.

Typical efficiency and output current


The efficiency of a voltage regulator, defined as $(\text{Power out})/(\text{Power in})$, is an important measure of its performance, especially when battery life or heat are concerns. As shown in the graphs below, these switching regulators have an efficiency of 80% to 90% for most combinations of input voltage, output voltage, and load.

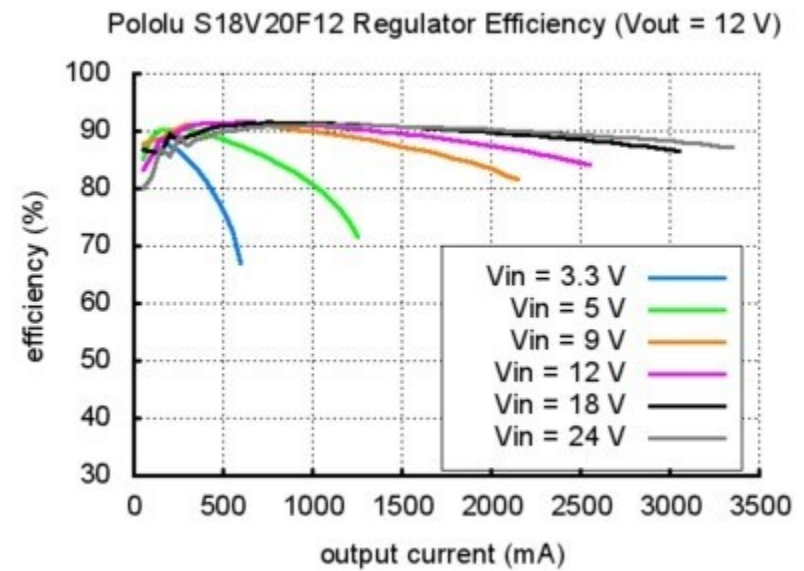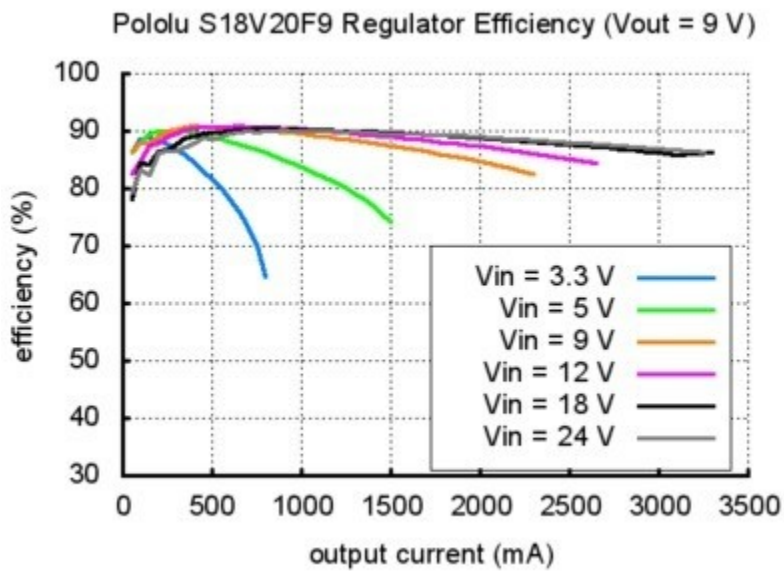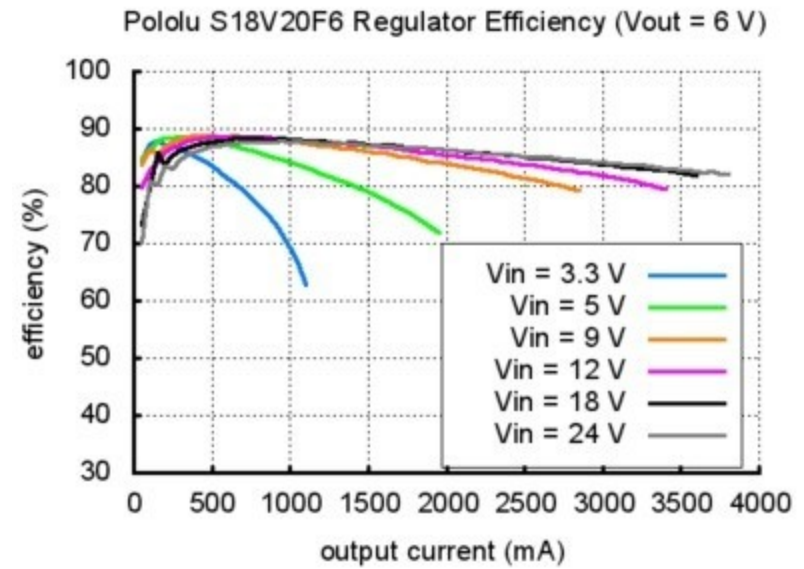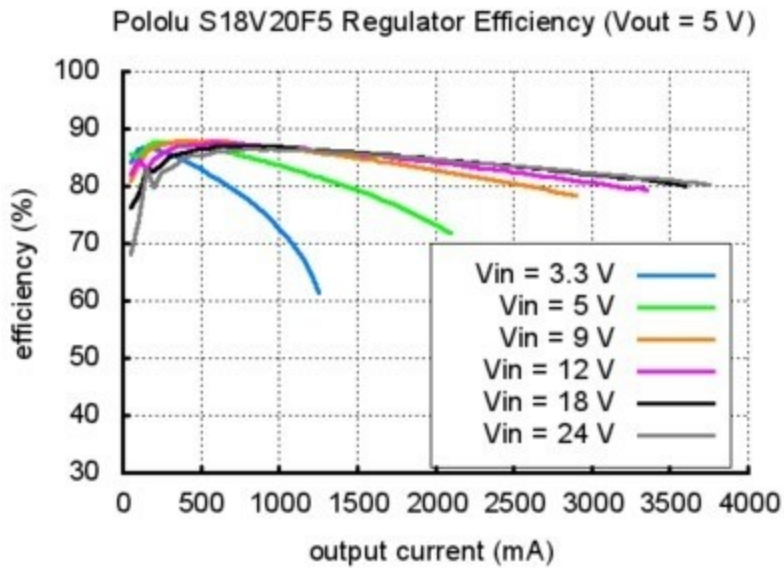

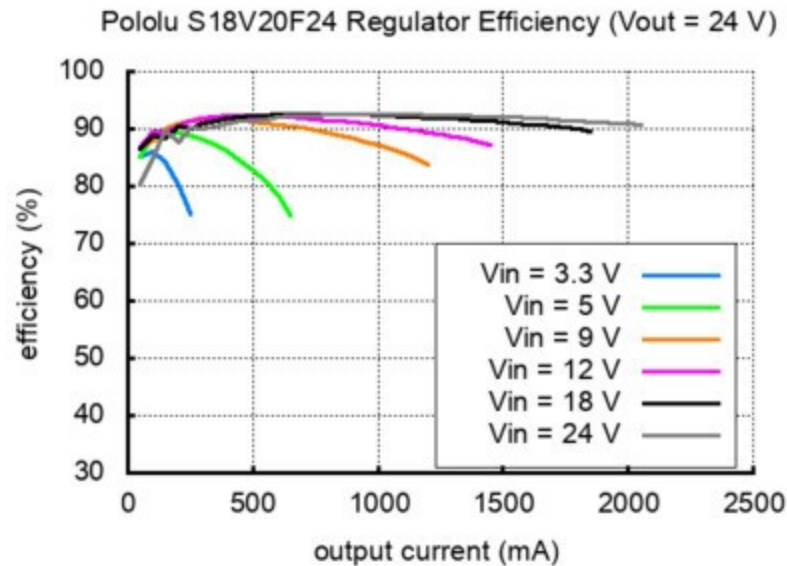

We manufacture these boards in-house at our Las Vegas facility, which gives us the flexibility to make batches of regulators with customized components to better meet the needs of your project. For example, if you have an application where the input voltage will always be below 20 V and efficiency is very important, we can make these regulators a bit more efficient at high loads by replacing the 30V reverse voltage protection MOSFET with a 20V one. We can also customize the set output voltage. If you are interested in customization, please [contact us](#).

The maximum achievable output current of the board varies with the input voltage but also depends on other factors, including the ambient temperature, air flow, and heat sinking. The graphs below show output currents at which this voltage regulator's over-temperature protection typically kicks in after a few seconds. These currents represent the limit of the regulator's capability and cannot be sustained for long periods, so the continuous currents that the regulator can provide are typically several hundred milliamps lower.

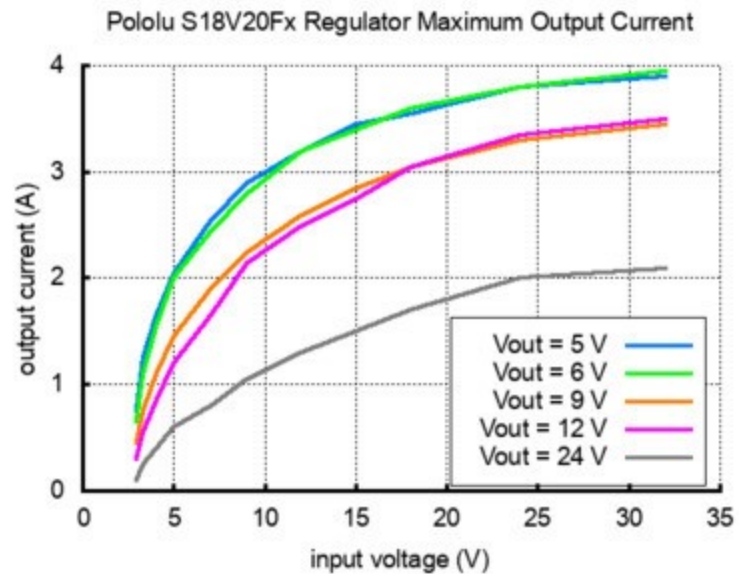

During normal operation, this product can get hot enough to burn you. Take care when handling this product or other components connected to it.

File downloads

[Dimension diagram of the S18V20x Step-Up/Step-Down Voltage Regulator \(309k pdf\)](#)

[3D model of the S18V20x Step-Up/Step-Down Voltage Regulator \(4MB step\)](#)

[Step-Up/Step-Down Voltage Regulator S18V20x drill guide \(44k dxf\)](#)

This DXF drawing shows the locations of all of the board's holes.

Frequently-asked questions

No FAQs available.

On the blog



New product: 24V Step-Up/Step-Down Voltage Regulator S18V20F24 by Emily - 18 February 2019

The 24V Step-Up/Step-Down Voltage Regulator S18V20F24 is the newest addition to our line of S18V20x step-up/step-down voltage regulators. This 24 V...
