



# INTERCONNECTS


## SERIES 800 & 801 • .100" GRID (.030" DIA. PINS), STRAIGHT & RIGHT ANGLE HEADERS AND SOCKETS • SINGLE ROW STRIPS

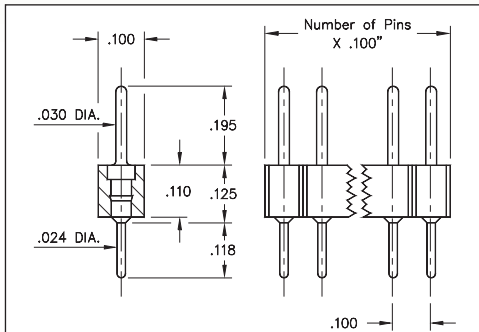


**FIG. 1**

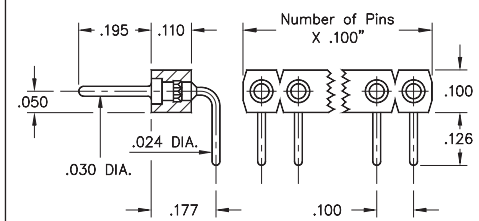

**FIG. 2**

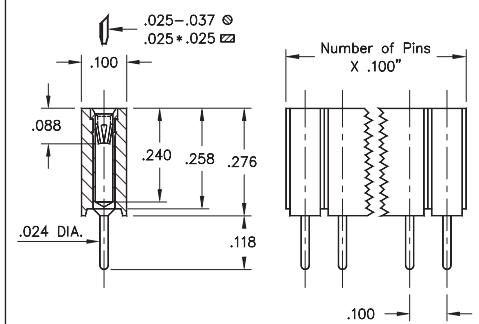


**FIG. 3**

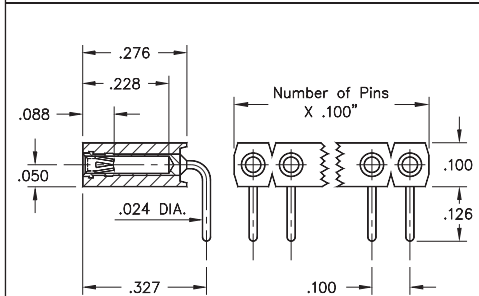

**FIG. 4**

- Pin interconnects available with straight MM #7007 or right angle MM #5005 solder tails. See page 215 for details
- Sockets are available with straight MM #1304 or right angle MM #1305 soldertails. See pages 177 and 179 for details
- MM #1304 and MM #1305 receptacles use Hi-Rel, 6-finger BeCu #47 contact rated at 4.5 amps. Receptacles accept .030" diameter and .025" square pins. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

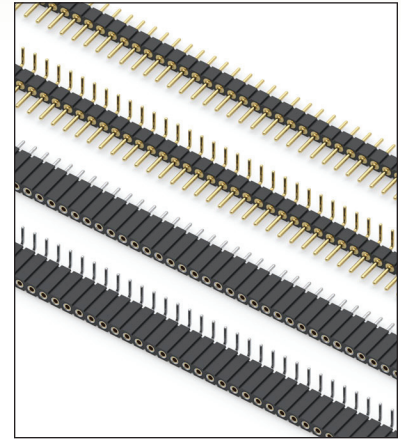

### ORDERING INFORMATION
















FIG. 1	Series 800...10-001		Straight Pin Header		
	Specify number of pins	800-XX-0	-10-001000	01-64	
FIG. 2	Series 800...20-001		Right Angle Pin Header		
	Specify number of pins	800-XX-0	-20-001000	02-64	
  					
SPECIFY PLATING CODE XX=		10 	90	40 	
Pin Plating 		10 μ" Au	200 μ" Sn/Pb	200 μ" Sn	

FIG. 3	Series 801...10-001		Straight Socket						
	Specify number of pins	801-XX-0	-10-001000	01-50					
FIG. 4	Series 801...20-001		Right Angle Socket						
	Specify number of pins	801-XX-0	-20-001000	01-50					
  									
SPECIFY PLATING CODE XX=		91	93	99	41 	43 	44 	47 	
Sleeve (Pin) 		200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	200 μ" Sn	200 μ" Sn	
Contact (Clip) 		10 μ" Au	30 μ" Au	100 μ" Sn/Pb	10 μ" Au	30 μ" Au	100 μ" Sn	Au Flash	

★ 44 Plating Non-Standard

