

Model No.: PMT-40N25AL01-04
 Product Line: Tymphany


Rev: 1
 Last Update: 2017-04-25 21:32:09

Product Description

This 40 mm 4 ohm compact premium micro transducer is designed for computer, television array, and similar applications. It features a neodymium magnet, a light aluminium cone, and a high-temperature polycarbonate frame. The PMT family's transducers feature low resonant frequencies, low THD and a full range bandwidth.




Mechanical Drawing

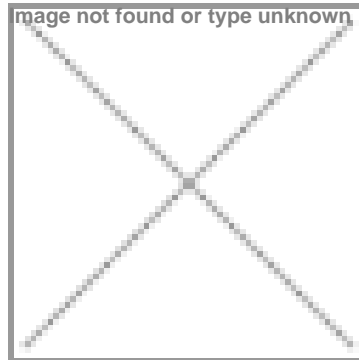

Specifications

DC Resistance	Revc	Ohms	3.67	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	4.39	7.5%	Moving Mass	Mms	g	1
Voice Coil Inductance	Le	mH	0.08		Suspension Compliance	Cms	um/N	457
Resonant Frequency	Fs	Hz	234.6	15%	Effective Cone diameter	D	cm	3.29
Mechanical Q Factor	Qms		2.21		Effective Piston Area	Sd	cm^2	8.5
Electrical Q Factor	Qes	0.61			Effective Volume	Vas	L	0.05
Total Q Factor	Qts	0.48			Motor Force Factor	BL	Tm	3
Ratio Fs/Qts	F	Fs/Qts	492.86		Motor Efficiency Factor	β	(T*M^2)/Ohms	2.4
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	85.44	+/- 1.0db	Voice coil former Material	VCfm		KSV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	82.8	+/- 1.0db	Voice coil inner diameter	VCd	mm	25.5
Gap Height	Gh	mm	2		Rated Noise Power	P	W	5
Maximum Linear Excursion	Xmax	mm	1.9		Test Spectrum Bandwidth		100 Hz - 20K Hz	
Ferrofluid Type	FF		APG834		Driver Size	Inch	40 mm	
Driver Mass	Kg	0.07						

Frequency and Impedance Response

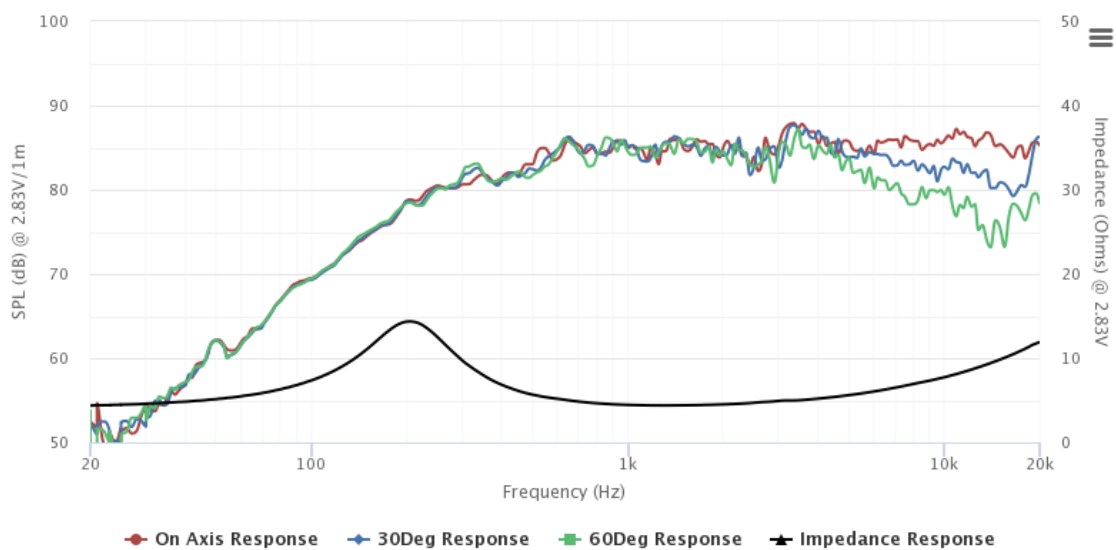

Highcharts.com