

A

B

C








D

A

B

C

D

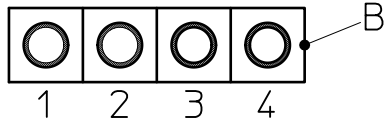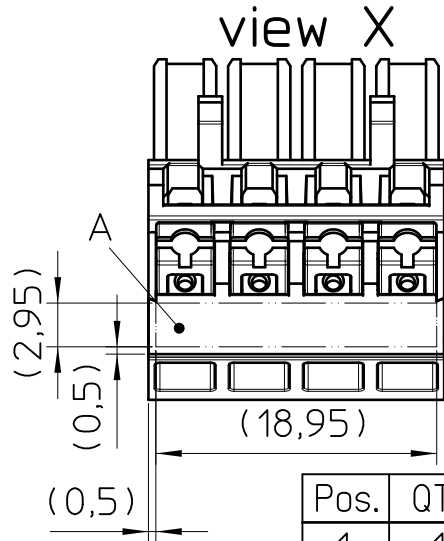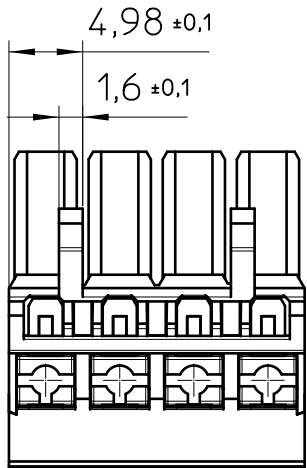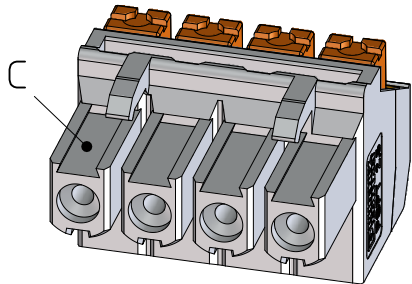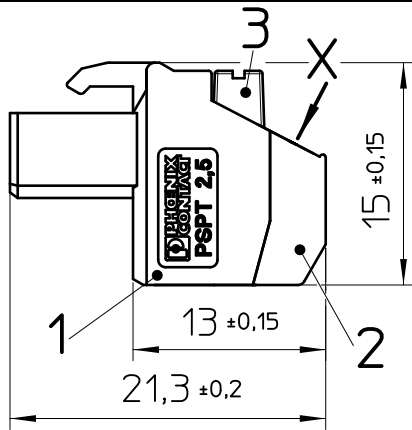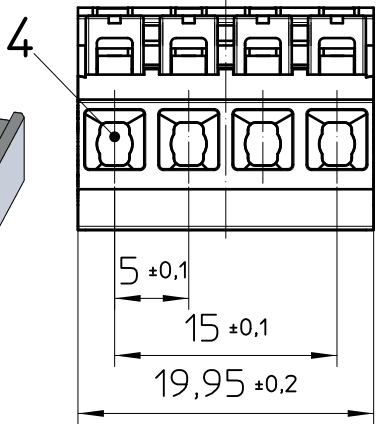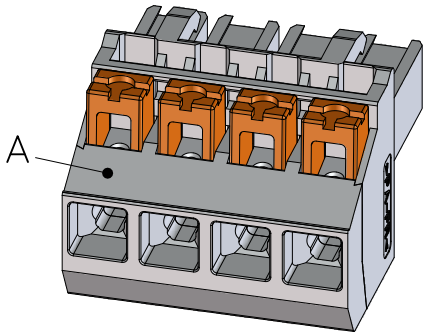

General Information:

- Corresponding header MSTB0 2,5/ 4-G1P
- Simplified representation, exemplary shown in gray.
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2,PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #0306

Additional Information:

- A. Marking area
- B. Contact type
- C. Coding profile: CP-MSTB

schematic symbol	description	electrical symbol
	single contact	
	without contact	

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	1	COVER	PA
3	4	SPRING OPENER	PBT
4	4	PUSH-IN CONTACT	Cu alloy,STL

 DIN A4		document-no. / ri 00872296 / 02		article-no. 2202344		scale 2:1		- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 28.11.2022	document-type					
		description PSPT 2,5/ 4-ST KMGY						
page 1		of 1						