

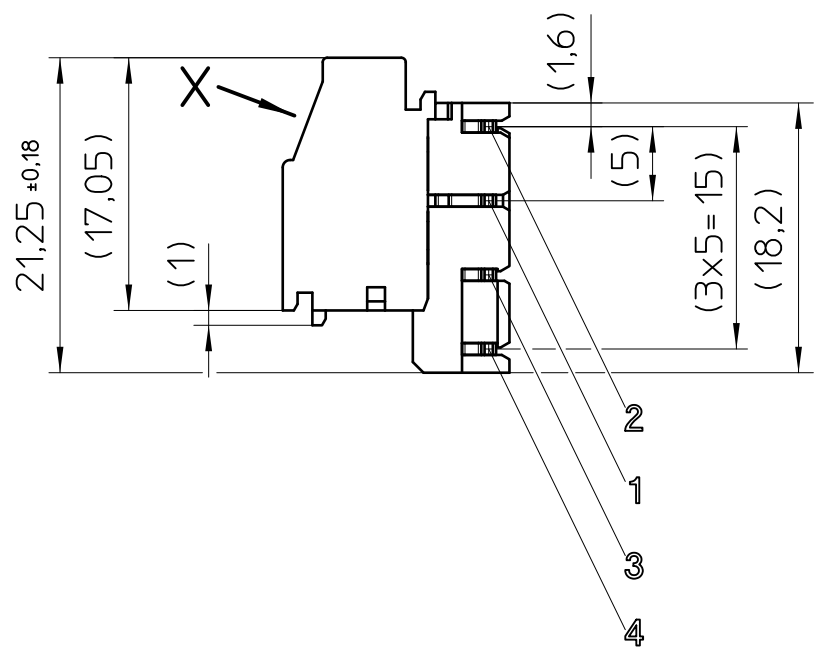
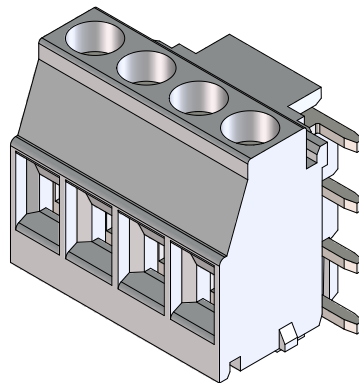
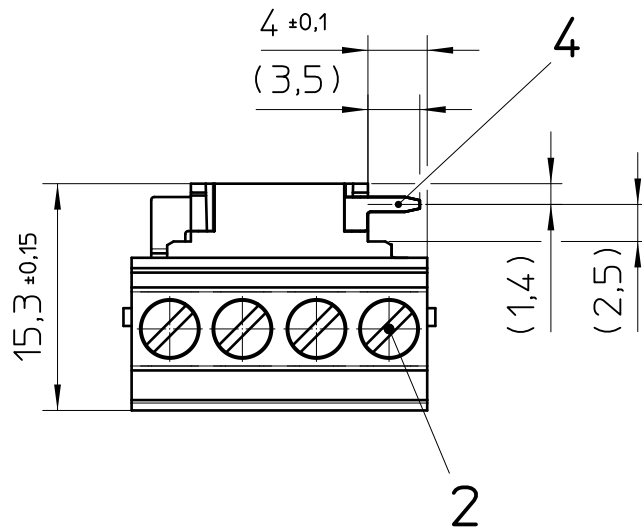
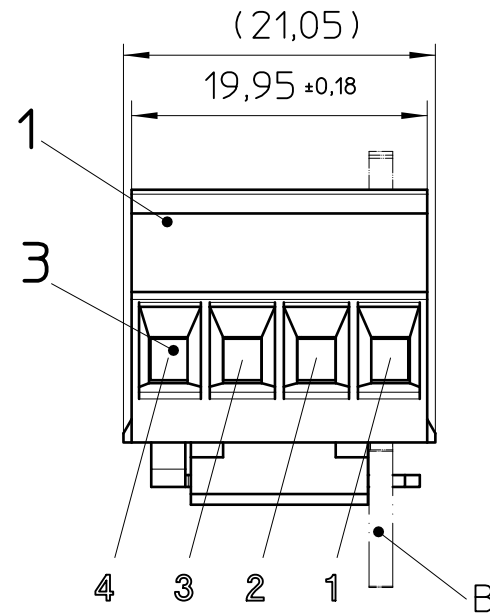


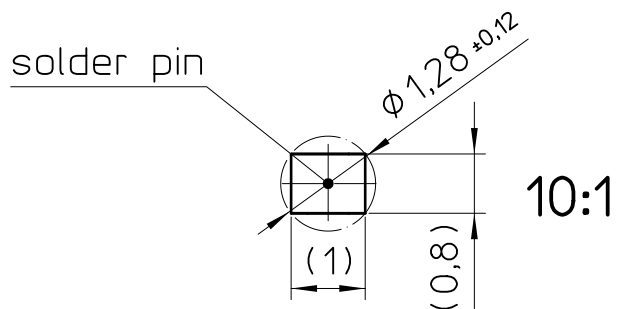


view: X

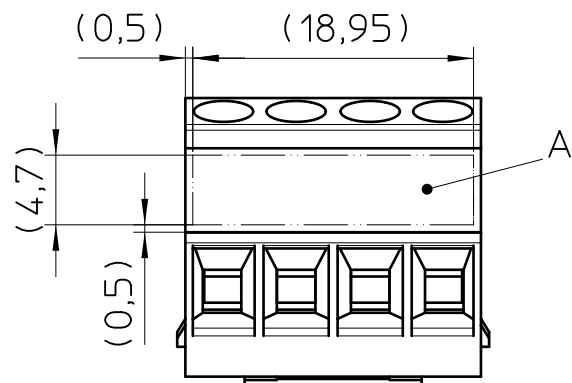

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	4	SCREW	Cu alloy
3	4	CLAMPING SLEEVE	Cu alloy
4	4	SOLDER PIN	Cu alloy

Recommended PCB

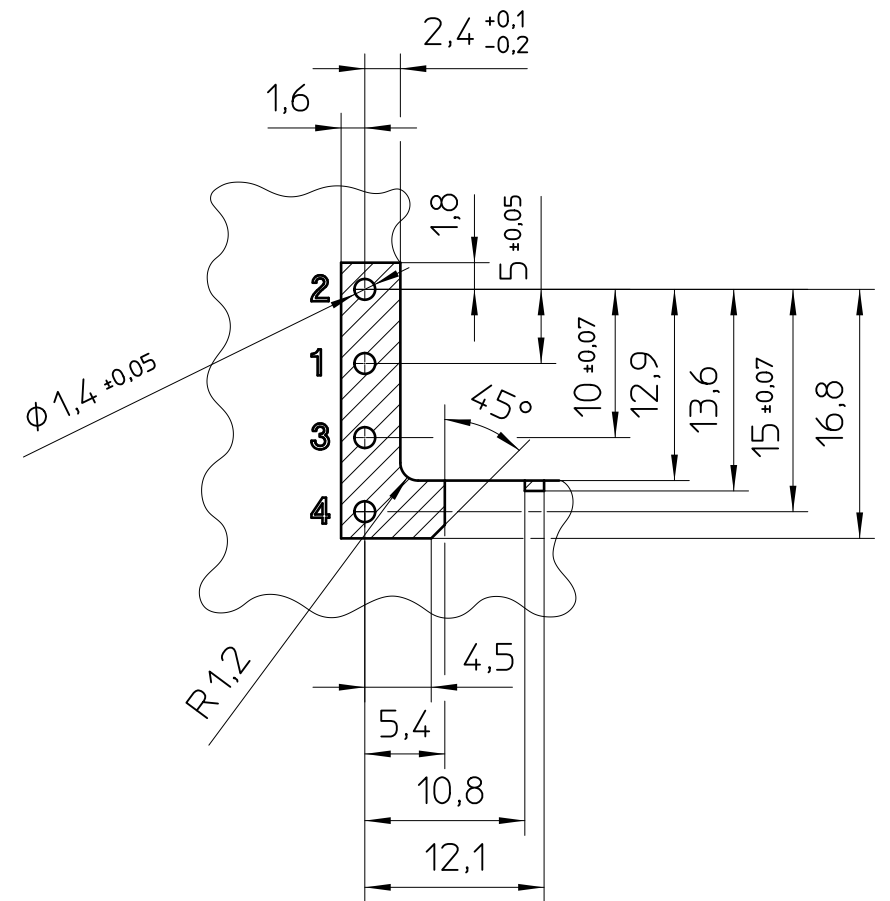

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
-  Restricted area
- General tolerances PCB:
dimensions ≤ 30: ±0,1/R±0,2/±1°
dimensions > 30: ±0,15/R±0,2/±1°
symmetry: 0,2
- Web: www.phoenixcontact.com

Additional information:

- A. Marking area
- B. PCB t=1,6±0,2

 DIN A3	document-no. / ri		article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
	00814578 / 03		2908472	2:1	
	date	document-type			
	27.01.2023	TECDOC 2D_Productdrawing			
description		MKDSO 2,5/ 4-R KMGY			
page 1	of 1				