

Product name, item number, category, ...



EN ▾




[Home](#) | [Product finder](#) | [Test probes](#) | [Assorted test probes](#)

Spring-loaded test probe

GKS-967 306 130 A 2001

Item GKS-967-0015

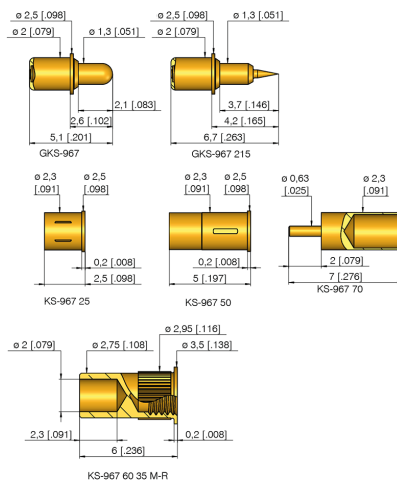

- ✓ Short-stroke probes ensure a reliable signal and power supply, as well as a quick exchange of assemblies in case of maintenance
- ✓ For the construction of easily separable electronic interfaces, such as in charging trays for electronic devices
- ✓ Particularly suitable for use in applications where space for overall length is limited

[Show more ▾](#)

Please log in to show the price [Log in](#)

QUANTITY

Add to cart

The prices listed in the scale are displayed rounded, therefore deviation in the total price is possible. shipping costs
 * The prices are rounded to two decimal places.

Downloads





EN ▾



INGUN_GKS-967_306_130_A_xx01 (STEP)

Technical data

Here you can optionally configure a new variant:

[Reconfigure variant](#)

General data

Product group :
 Sub-product group :
 Series :
 Grid :
 Contacting from :
 Magnetic :
 Installation type :
 Quick-exchange system :
 Adjustable installation height :
 Non-rotating :
 Compatible receptacle(s) :
 Min. temperature :
 Max. temperature :
 RoHS-compliant :

Electrical data

Assorted test Current load capacity / rated current :

Short stroke Technical resistance (Ri) :

Mechanical data

GKS-967
 3 mm
 Pin, Post, Flat
 Yes
 Plug-in
 Yes
 No
 No
 KS-967
 - 40 °C
 + 80 °C
 RoHS-3;6c
 Total length :
 Barrel diameter :
 Maximum stroke :
 Spring force at working stroke :
 Spring pre-load :
 Collar height :
 Working stroke :
 Tip style data
 Tip style :
 Tip diameter :
 Tip style surface :
 Tip style material :

[Receptacles](#)

[Spacer sleeve](#)

[7.60 mm](#)